



BONETTI®

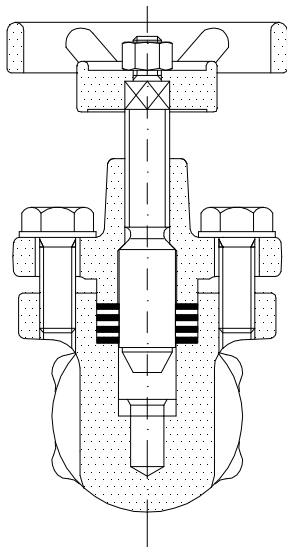

BONT® Forged Steel Instrumentation Valves

- type VS3 - 3000 psi
- type VS6 - 6000 psi

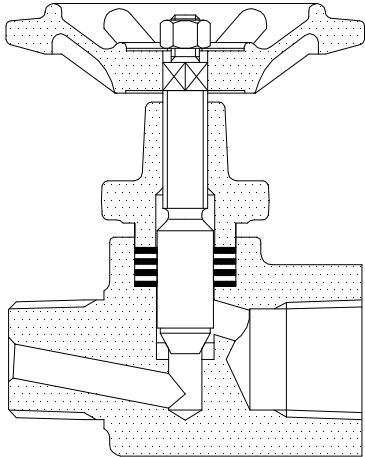

CESARE BONETTI S.p.A.

I-20024 GARBAGNATE MILANESE (Italy)
Via Cesare Bonetti 17
Telephone: +3902 990721- Telefax: +3902 9952483
Internet: <http://www.cesare-bonetti.it>

Export sales: Telephone +3902 99072444
Telefax +3902 99072400
E-mail: export@cesare-bonetti.it

This catalogue is exclusive property of Cesare Bonetti S.p.A.
Any unauthorised reproduction, in total or in part, of this catalogue shall be prosecuted.
Products and data sheets of this catalogue are referred to current standard production. Cesare Bonetti S.p.A. reserves the right to

carry out any necessary alteration to products and materials.
Amendments or modifications to drawing and material can be done also to comply particular Customer's requests or technical specifications.

BONT® Valves type VS

APPLICATION RANGE

The BONT® Valves type VS are needle valves recommended for instrumentation and for any throttling and shut-off service.

DESIGN PRINCIPLES

BONT® Valve type VS is a metal to metal seat needle valve having 6 mm seat diameter.

- Forged body and bonnet
- Bolted bonnet connection
- Outside screw, therefore threads not in contact with the fluid avoiding corrosion and assuring smooth operation
- Blowout-proof and backseating stem
- Non-rotating disk, made of ASTM A479 316 nitrated assure perfect sealing and resistance to erosion
- Packing patented, preformed from graphite and stainless steel sheets guarantees perfect seal towards the atmosphere and does not require any maintenance
- Adjustable packing
- Low torque due to special packing and non-rotating disk
- Ideal for areas where danger of fire exists.

RATING

BONT® Valves type VS are manufactured in two types:

type VS3 - 3000 psi at 100 °F (210 bar at 38 °C)

type VS6 - 6000 psi at 100 °F (420 bar at 38 °C).

Maximum working temperatures depend on the body and bon-net material:

- Body and bonnet of ASTM A1 05:

Material Schedule 52: Max Temp. 425 °C

- Body and bonnet of ASTM of S.S. ASTM A1 82 F316:

Material Schedule 63: Max Temp. 550 °C.

BONT®, Valves type VS are in accordance with Standard Practice MSS SP-99 - Instrument Valves.

CONNECTIONS

Standard connections are:

- threaded as per ASME B1.20.1

- socket weld as per ASME B16.11

The connection sizes are listed in the following table:

Type	Input	Output	Dimension (mm)			Fig.
			A	G	H	
VS3	1/2" M	1/2" F	63	64	71	550
	1/2"	1/2"	70	64	71	551
	3/4"	3/4"	70	64	71	551
VS6	1/2"	1/211	70	64	71	551
	3/4"	3/4"	70	64	71	551

Valve VS3 of Fig. 550 can be supplied only with the ends threaded male-female.

Other connection available on request.

MATERIAL SCHEDULES

VS Valves are manufactured in different Material Schedules.

The main characteristic elements of the more diffused Material Schedules are:

Material Schedule	Material of Body and Bonnet
52	Carbon Steel ASTM A1 05
63	Stainies Steel ASTM A182 F316

Fig. 550

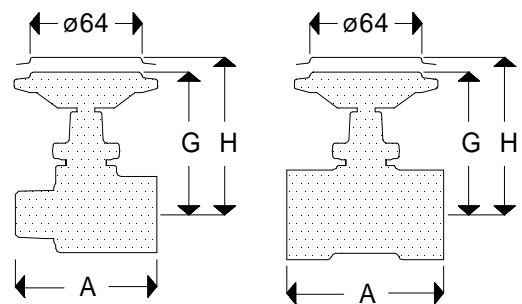
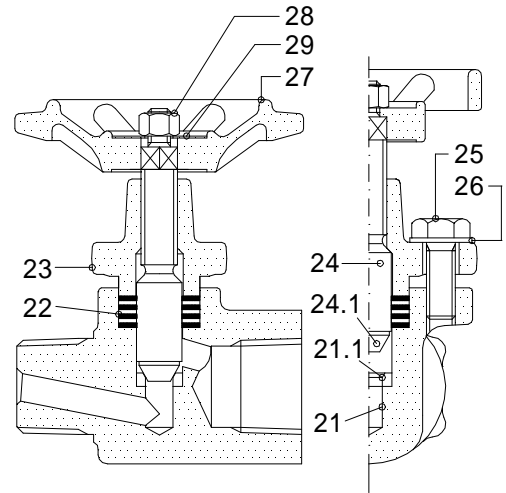


Fig. 550

Fig. 551

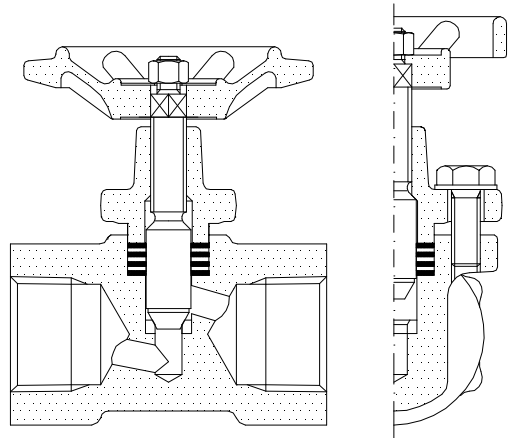


Fig. 551

Item Part	Part Material for Material Schedule	
	52	63
21 Body	ASTM A1 05	ASTM A1 82 F316
21.1 Seat	ASTM A479 316	integral
22 Packing	Graphite + S.S.	Graphite + S.S.
23 Bonnet	ASTM A1 05	ASTM A182 F316
24 Stem	ASTM A1 82 F6a	ASTM A479 316 Nitr.
24.1 Disk	ASTM A479 316 Nitr.	ASTM A479 316 Nitr.
25 Screw	ASTM A1 93 B7	ASTM A193 B8
26 Washer	Carbon Steel	Carbon Steel
27 Handwheel	Aluminium	Aluminium
28 Handweel Nut	Carbon Steel	Carbon Steel
29 Name Plate	Stainless Steel	Stainless Steel